



Cordless Vacuum Pump DVP181



4CFM^{*1} class cordless vacuum pump

*1: CFM stands for Cubic Feet per Minute (4 CFM = approx 113 L per minute)

Ultimate vacuum

3 Pa

Flow rate^{*2}

113 L/min

Continuous run time^{*3}

60 min

*2: Flow rate varies depending on the conditions of the connected equipment and environmental conditions

*3: With two BL1860B batteries



Dual-stage compression method
can generate vacuum level much higher.



Ultimate vacuum
3 Pa

Flow rate*²
113 L/min

Continuous*³ run time
60 min




Powered by two 18V LXT Li-Ion batteries in parallel
"In-use" indicating LED indicates which battery is currently supplying power.



*2: Flow rate varies depending on the conditions of the connected equipment and environmental conditions
*3: With two BL1860B batteries

Reference connection

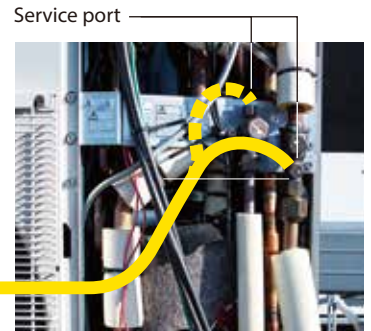

Electromagnetic check valve
prevents backflow of pump oil even if the battery runs out during vacuuming.



Shoulder belt (option)
can be attached.



Charging Time

Battery Model	Fast Charging	
	DC18RC	DC18SD
BL1830B 3.0Ah	22 min	60 min
BL1840B 4.0Ah	36 min	90 min
BL1850B 5.0Ah	45 min	110 min
BL1860B 6.0Ah	55 min	130 min

Accessories

Vacuum hose
Part No. AS0A1154MK



Shoulder belt
Part No. 199486-4



Vacuum pump valve with vacuum gauge
Part No. AS0VP085MK



Vacuum pump oil
Part No. AS0VP083MK



Cordless Vacuum Pump DVP181

Flow Rate	113 L/min
Motor speed	3,200 min ⁻¹
Oil Tank Capacity	300 mL
Inlet port	5/16 / 3/8"
Dimensions (L x W x H)	383 x 193 x 210 mm (15-1/8 x 7-5/8 x 8-1/4")
Net weight	8.1 - 8.2 kg (17.9 - 18.1 lbs.)

Carrying Case

Standard Equipment : Vacuum Pump Oil, Adapter

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table.
Items of standard equipment and specifications may vary by country or area.

Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN 202203