













High cutting performance



Work amount on a full battery charge

When cutting ø15mm branches of Japanese cypress

about **2,200** pcs

12Vmax CXT BL Cordless Pruning Shears

Slim and Lightweight design

The use of BL Coreless motor*1 allows for reduction in the grip diameter and weight to reduce user's fatigue from pruning.

*1 BL motor without iron core on which copper coil wire is wound





Two control buttons on the tool body

Main power button and Blade opening angle adjustment button are located side by side on the rear of the grip for easier blade control.





Main power button

Blade opening angle adjustment button

set in two levels.

Adjustment of blade

The opening angle of the shear blades can be

fully open

opening angle

Ø25_{mm}



half-open

Ø18_{mm}



Adjustment of blade overlap when closed



(by pressing and holding Blade opening angle adjustment button for 3 seconds or more when fully closed)

LED indicator

mounted on the front of the body, allowing the status of the machine to be checked at a glance.



Power on

Blinking: Battery capacity warning (when the capacity is 20% or less)


Solid on: Error indication (No battery capacity/ Thermal protection/ Overload)

External oil port

Lubrication oil can be injected without disassembling the blade.





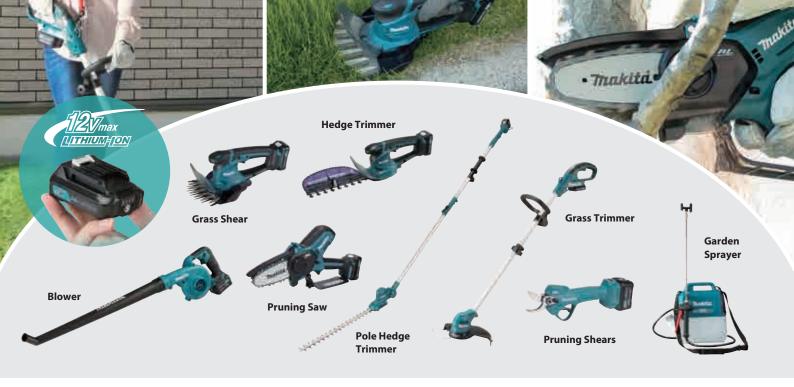

■ Cordless Pruning Saw

DUC101



UC100D





Accessories

Shear blade U set

Part No. 1911W2-5

Replacement upper blade for Pruning shears



Shear blade L set

Part No. 1911W1-7


Replacement lower blade for Pruning shears



Dresser stone set

Part No. 1912E4-1

Dresser stone for Shear blade



Holster

Part No. 162C23-5





MAKPAC TYPE2

Part No. 821550-0

For smart organization and easy transportation of power tools and accessories



Charging Time

12Vmax Literium jori	Fast Charging DC10SB	DC10WD
BL1016 1.5Ah	22 min	50 min
BL1021B 2.0Ah	30 min	70 min
BL1041B 4.0Ah	60 min	130 min

Cordless Pruning Shears

UP100D

OWD	
OWD	Carrying Case
min	
min	
Λ .	

Capacity	Max cutting: 25 mm (1")
Vibration level	2.5 m/s ² or less
Sound pressure level	70 dB(A) or less
Dimensions (L x W x H)	w/o Battery: 259 x 53 x 98 mm
	(10-1/4 x 2-1/16 x 3-7/8")
	w/BL1016/BL1021B: 285 x 64 x 98 mm
	(11-1/4 x 2-1/2 x 3-7/8")
	w/BL1041B: 308 x 64 x 98 mm
	(12-1/8 x 2-1/2 x 3-7/8")
Net weight	0.89 - 1.1 kg (2.0 - 2.4 lbs.)
-	•

 ${\bf Standard\ Equipment:\ Oil\ supply,\ Wrench\ set,\ Whetstone,\ Holster}$

The weight may differ depending on the attachment(s), including the battery cartridge. The lightest and heaviest combination, according to EPTA-Procedure 01/2014, are shown in the table. Items of standard equipment and specifications may vary by country or area.

Makita Corporation